

Part I: Anonymous Functions

Anonymous Functions

value

3

'(1 2 3)

(tiger 'Tony 14)

(lambda (x)
 (+ x 1))

definition

(define pi 3)

(define nums '(1 2 3))

(define tony
 (tiger 'Tony 14))

(define (f x)
 (+ x 1))

Applying Functions

```
((lambda (x) (+ x 1)) 10) → (+ 10 1)
```

```
(define (f x) (+ x 1))  
(f 10)  
→ (+ 10 1)
```

```
(define f (lambda (x) (+ x 1)))  
(f 10)  
→ ((lambda (x) (+ x 1)) 10)  
→ (+ 10 1)
```

Using Anonymous Functions

```
(map add1 '(1 2 3)) → '(2 3 4)
```

```
(map (lambda (x) (+ x 3))  
     '(1 2 3)) → '(4 5 6)
```

```
(andmap even? '(2 4 6)) → #t
```

```
(andmap (lambda (x)  
        (integer? (sqrt x)))  
        '(4 9 16)) → true
```

Part 2: How to Design Programs

<http://www.htdp.org>

How to Design Programs

- Determine the **representation**
 - data definition or **define-type**
- Write **examples**
 - **test**
- Create a **template** for the implementation
 - **cond** or **type-case**, if variants
 - extract field values, if any
 - cross- and self-calls, if data references
- Finish **body** implementation case-by-case
- Run **tests**

Representation

- Keep track of the number of cookies in a cookie jar

; number

; eat-cookie : number -> number

Representation

- Track a position on the screen

```
(define-type Posn  
  [posn (x number?)  
    (y number?)])  
  
; flip : Posn -> Posn
```

Representation

- Track an ant, which has a location and a weight

```
(define-type Ant  
  [ant (location Posn?)  
    (weight number?)])  
  
; ant-at-home? : Ant -> boolean
```

Representation

- Track an animal, which is a snake or a tiger

```
(define-type Animal
  [snake (name symbol?)
        (weight number?)
        (food symbol?)]
  [tiger (name symbol?)
        (stripe-count number?)])

; heavy-animal? : Animal -> boolean
```

Representation

- Track an aquarium, which has any number of fish, each with a weight

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)  
  
; feed-fish : list-of-number  
; -> list-of-number
```

Examples

```
; number
```

```
; eat-cookie : number -> number
```

```
(test (eat-cookie 10) 9)
```

```
(test (eat-cookie 1) 0)
```

```
(test (eat-cookie 0) 0)
```

Examples

```
(define-type Posn
  [posn (x number?)
        (y number?)])

; flip : Posn -> Posn

(test (flip (posn 1 17)) (posn 17 1))
(test (flip (posn -3 4)) (posn 4 -3))
```

Examples

```
(define-type Ant
  [ant (location Posn?)
       (weight number?)])

; ant-at-home? : Ant -> boolean

(test
  (ant-at-home? (ant (posn 0 0) 0.0001))
  #t)
(test
  (ant-at-home? (ant (posn 5 10) 0.0001))
  #f)
```

Examples

```
(define-type Animal
  [snake (name symbol?)
        (weight number?)
        (food symbol?)]
  [tiger (name symbol?)
        (stripe-count number?)])
```

```
; heavy-animal? : Animal -> boolean
```

```
(test (heavy-animal? (snake 'Slinky 10 'rats))
      #t)
(test (heavy-animal? (snake 'Slimey 8 'cake))
      #f)
(test (heavy-animal? (tiger 'Tony 14))
      #t)
```

Examples

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)
```

```
; feed-fish : list-of-number  
; -> list-of-number
```

```
(test (feed-fish '()) '())  
(test (feed-fish '(1 2 3)) '(2 3 4))
```

Template

```
; number  
  
; eat-cookie : number -> number  
  
(define (eat-cookie n)  
  ... n ...)
```

Template

```
(define-type Posn
  [posn (x number?)
        (y number?)])
```

```
; flip : Posn -> Posn
```

```
(define (flip p)
  ... (posn-x p)
  ... (posn-y p) ...)
```

or

```
(define (flip p)
  (type-case Posn p
    [posn (x y) ... x ... y ...]))
```

Template

```
(define-type Ant
  [ant (location Posn?)
       (weight number?)])

; ant-at-home? : Ant -> boolean

(define (ant-at-home? a)
  (type-case Ant a
    [ant (loc wgt)
         ... loc ...
         ... wgt ...]))
```

Template

```
(define-type Ant
  [ant (location Posn?)
       (weight number?)])

; ant-at-home? : Ant -> boolean

(define (ant-at-home? a)
  (type-case Ant a
    [ant (loc wgt)
     ... (is-home? loc) ...
     ... wgt ...]))

(define (is-home? p)
  (type-case Posn p
    [posn (x y) ... x ... y ...]))
```

Template

```
(define-type Animal
  [snake (name symbol?)
        (weight number?)
        (food symbol?)]
  [tiger (name symbol?)
        (stripe-count number?)])

; heavy-animal? : Animal -> boolean

(define (heavy-animal? a)
  (type-case Animal a
    [snake (n w f)
           ... n ... w ...
           ... f ...]
    [tiger (n sc)
           ... n ... sc ...]))
```

Template

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)  
  
; feed-fish : list-of-number  
; -> list-of-number  
  
(define (feed-fish lon)  
  (cond  
    [(empty? lon) ...]  
    [(cons? lon) ...]))
```

Template

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)  
  
; feed-fish : list-of-number  
; -> list-of-number  
  
(define (feed-fish lon)  
  (cond  
    [(empty? lon) ...]  
    [(cons? lon)  
      ... (first lon) ...  
      ... (rest lon) ...]))
```

Template

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)  
  
; feed-fish : list-of-number  
; -> list-of-number  
  
(define (feed-fish lon)  
  (cond  
    [(empty? lon) ...]  
    [(cons? lon)  
      ... (first lon) ...  
      ... (feed-fish (rest lon)) ...]))
```

Body

```
; number
```

```
; eat-cookie : number -> number
```

```
(define (eat-cookie n)  
  ... n ...)
```

Body

```
; number
```

```
; eat-cookie : number -> number
```

```
(define (eat-cookie n)  
  (if (> n 0)  
    (- n 1)  
    0))
```

Body

```
(define-type Posn
  [posn (x number?)
        (y number?)])

; flip : Posn -> Posn

(define (flip p)
  (type-case Posn p
    [posn (x y) ... x ... y ...]))
```

Body

```
(define-type Posn
  [posn (x number?)
        (y number?)])

; flip : Posn -> Posn

(define (flip p)
  (type-case Posn p
    [posn (x y) (posn y x)]))
```

Body

```
(define-type Ant
  [ant (location Posn?)
       (weight number?)])

; ant-at-home? : Ant -> boolean

(define (ant-at-home? a)
  (type-case Ant a
    [ant (loc wgt)
         ... (is-home? loc) ...
         ... wgt ...]))

(define (is-home? p)
  (type-case Posn p
    [posn (x y) ... x ... y ...]))
```

Body

```
(define-type Ant
  [ant (location Posn?)
       (weight number?)])

; ant-at-home? : Ant -> boolean

(define (ant-at-home? a)
  (type-case Ant a
    [ant (loc wgt) (is-home? loc)]))

(define (is-home? p)
  (type-case Posn p
    [posn (x y) ... x ... y ...]))
```

Body

```
(define-type Ant
  [ant (location Posn?)
       (weight number?)])

; ant-at-home? : Ant -> boolean

(define (ant-at-home? a)
  (type-case Ant a
    [ant (loc wgt) (is-home? loc)]))

(define (is-home? p)
  (type-case Posn p
    [posn (x y) (and (zero? x)
                     (zero? y))]))
```

Body

```
(define-type Animal
  [snake (name symbol?)
         (weight number?)
         (food symbol?)]
  [tiger (name symbol?)
         (stripe-count number?)])

; heavy-animal? : Animal -> boolean

(define (heavy-animal? a)
  (type-case Animal a
    [snake (n w f)
           ... n ... w ...
           ... f ...]
    [tiger (n sc)
           ... n ... sc ...]))
```

Body

```
(define-type Animal
  [snake (name symbol?)
         (weight number?)
         (food symbol?)]
  [tiger (name symbol?)
         (stripe-count number?)])

; heavy-animal? : Animal -> boolean

(define (heavy-animal? a)
  (type-case Animal a
    [snake (n w f) (>= w 10)]
    [tiger (n sc)
     ... n ... sc ...]))
```

Body

```
(define-type Animal
  [snake (name symbol?)
        (weight number?)
        (food symbol?)]
  [tiger (name symbol?)
        (stripe-count number?)])

; heavy-animal? : Animal -> boolean

(define (heavy-animal? a)
  (type-case Animal a
    [snake (n w f) (>= w 10)]
    [tiger (n sc) #t]))
```

Body

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)  
  
; feed-fish : list-of-number  
; -> list-of-number  
  
(define (feed-fish lon)  
  (cond  
    [(empty? lon) ...]  
    [(cons? lon)  
      ... (first lon) ...  
      ... (feed-fish (rest lon)) ...]))
```

Body

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)
```

```
; feed-fish : list-of-number  
; -> list-of-number
```

```
(define (feed-fish lon)  
  (cond  
    [(empty? lon) empty]  
    [(cons? lon)  
      ... (first lon) ...  
      ... (feed-fish (rest lon)) ... ]))
```

Body

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)
```

```
; feed-fish : list-of-number  
; -> list-of-number
```

```
(define (feed-fish lon)  
  (cond  
    [(empty? lon) empty]  
    [(cons? lon)  
      ... (+ 1 (first lon)) ...  
      ... (feed-fish (rest lon)) ... ]))
```

Body


```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)
```

```
; feed-fish : list-of-number  
; -> list-of-number
```

```
(define (feed-fish lon)  
  (cond  
    [(empty? lon) empty]  
    [(cons? lon)  
      (cons (+ 1 (first lon))  
            (feed-fish (rest lon))))])
```


Implementation Matches Data

```
; A list-of-number is either  
; - empty  
; - (cons number list-of-number)  
  
; feed-fish : list-of-number -> list-of-number  
(define (feed-fish lon)  
  (cond  
    [(empty? lon) ...]  
    [(cons? lon) ... (first lon)  
    ... (feed-fish (rest lon)) ...]))
```

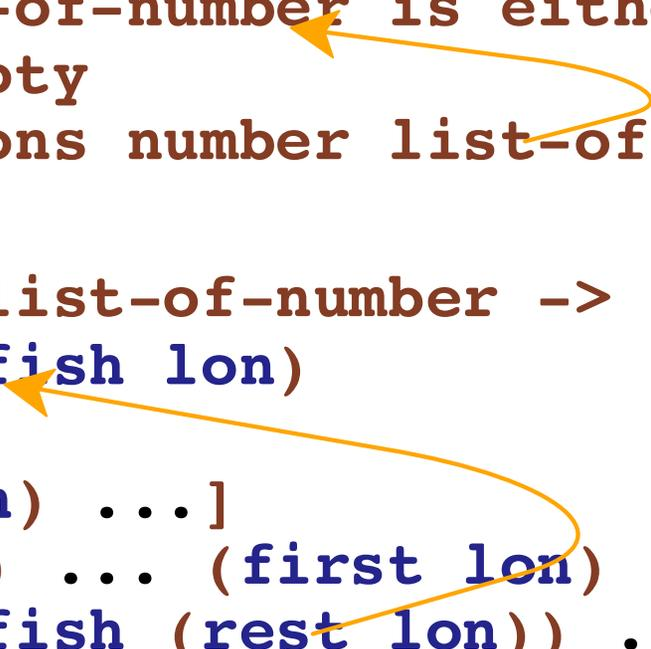

Part 3: GUI Examples


GUIs

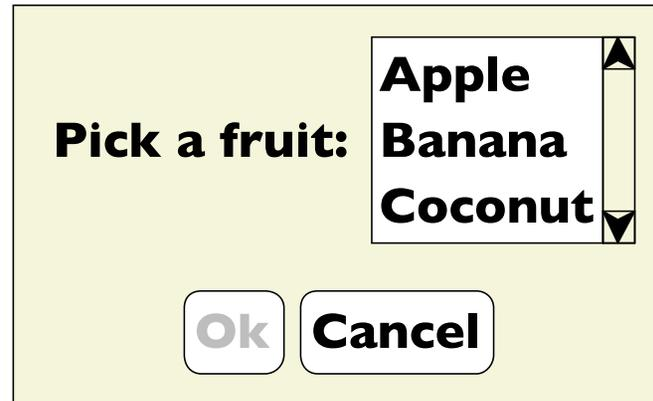

Possible programs:

- Can click?
- Find a label
- Read screen

Representing GUIs

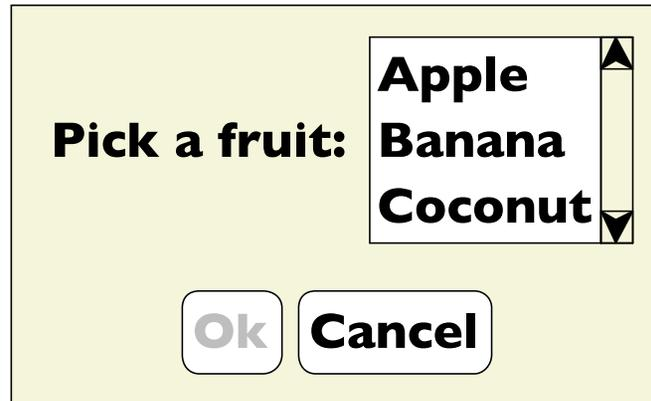

- labels
 - a label string
- buttons
 - a label string
 - enabled state
- lists
 - a list of choice strings
 - selected item

```
(define-type GUI  
  [label (text string?)]  
  [button (text string?)  
          (enabled? boolean?)]  
  [choice (items (listof string?))  
          (selected integer?)])
```

Read Screen

- Implement **read-screen**, which takes a GUI and returns a list of strings for all the GUI element labels

Read Screen


```
; read-screen : GUI -> list-of-string  
(define (read-screen g)  
  (type-case GUI g  
    [label (t) (list t)]  
    [button (t e?) (list t)]  
    [choice (i s) i]))
```

```
(test (read-screen (label "Hi"))  
      '("Hi"))
```

```
(test (read-screen (button "Ok" true))  
      '("Ok"))
```

```
(test (read-screen (choice '("Apple" "Banana") 0))  
      '("Apple" "Banana"))
```


Assemblings GUIs

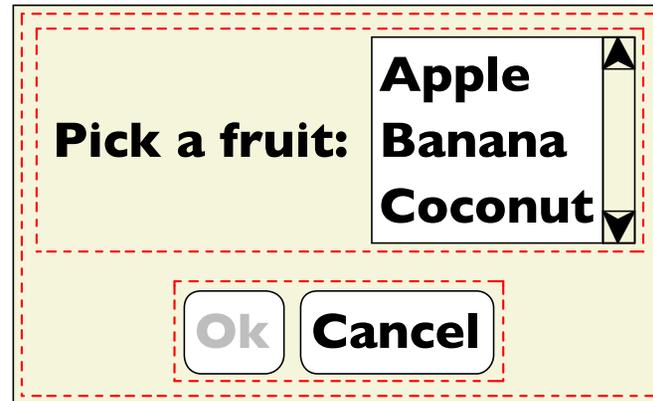

- label
- buttons
- lists
- vertical stacking
 - two sub-GUIs
- horizontal stacking
 - two sub-GUIs

```
(define-type GUI
  [label (text string?)]
  [button (text string?)
          (enabled? boolean?)]
  [choice (items (listof string?))
          (selected integer?)]
  [vertical (top GUI?)
            (bottom GUI?)]
  [horizontal (left GUI?)
              (right GUI?)])
```

Assemblings GUIs

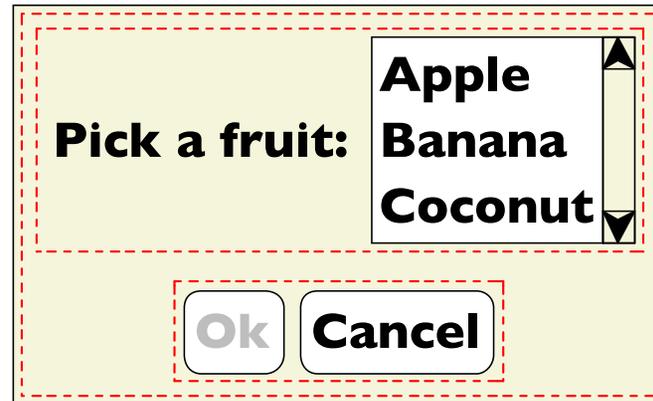

- label
 - buttons
 - lists
 - vertical stacking
 - two sub-GUIs
 - horizontal stacking
 - two sub-GUIs
- ```
(define guil
 (vertical
 (horizontal
 (label "Pick a fruit:")
 (choice '("Apple" "Banana" "Coconut")
 0))
 (horizontal
 (button "Ok" false)
 (button "Cancel" true))))
```

# Read Screen

- Implement **read-screen**, which takes a GUI and returns a list of strings for all the GUI element labels

# Read Screen

```
; read-screen : GUI -> list-of-string
(define (read-screen g)
 (type-case GUI g
 [label (t) (list t)]
 [button (t e?) (list t)]
 [choice (i s) i]
 [vertical (t b) (append (read-screen t)
 (read-screen b))]
 [horizontal (l r) (append (read-screen l)
 (read-screen r))]))

...
(test gui1
 ('("Pick a fruit:"
 "Apple" "Banana" "Coconut"
 "Ok" "Cancel")))
```

# Function and Data Shapes Match

```
(define-type GUI
 [label (text string?)]
 [button (text string?)
 (enabled? boolean?)]
 [choice (items (listof string?))
 (selected integer?)]
 [vertical (top GUI?)
 (bottom GUI?)]
 [horizontal (left GUI?)
 (right GUI?)])
```

```
(define (read-screen g)
 (type-case GUI g
 [label (t) (list t)]
 [button (t e?) (list t)]
 [choice (i s) i]
 [vertical (t b) (append (read-screen t)
 (read-screen b))]
 [horizontal (l r) (append (read-screen l)
 (read-screen r))]))
```

# Design Steps

- Determine the representation
  - **define-type**, maybe
- Write examples
  - **test**
- Create a template for the implementation
  - **type-case** plus natural recursion,  
**check shape!**
- Finish body implementation case-by-case
  - *usually the interesting part*
- Run tests

# Enable Button

- Implement **enable-button**, which takes a GUI and a string and enables the button whose name matches the string

# Enable Button



The **name** argument is “along for the ride”:

```
; enable-button : GUI string -> GUI
(define (enable-button g name)
 (type-case GUI g
 [label (t) g]
 [button (t e?) (cond
 [(equal? t name) (button t true)]
 [else g])]
 [choice (i s) g]
 [vertical (t b) (vertical (enable-button t name)
 (enable-button b name))]
 [horizontal (l r) (horizontal (enable-button l name)
 (enable-button r name))]))

...
(test (enable-button gui1 "Ok")
 (vertical
 (horizontal (label "Pick a fruit:")
 (choice '("Apple" "Banana" "Coconut") 0))
 (horizontal (button "Ok" true)
 (button "Cancel" true))))
```

# Show Depth

( test ( show-depth

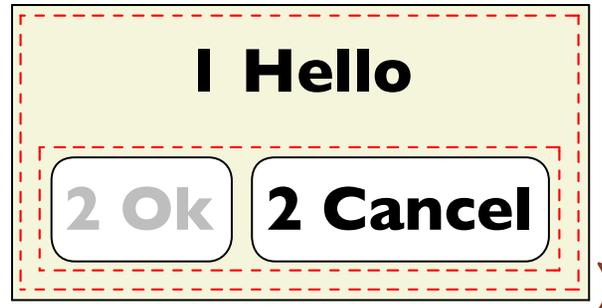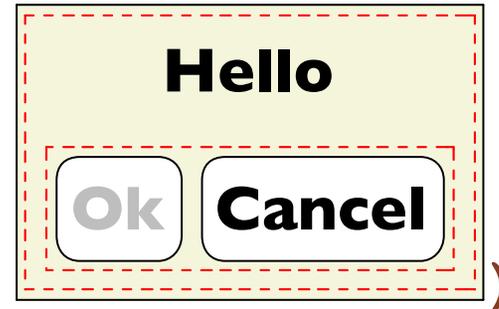

# Show Depth

Template:

```
(define (show-depth g)
 (type-case GUI g
 [label (t) ...]
 [button (t e?) ...]
 [choice (i s) ...]
 [vertical (t b) ... (show-depth t)
 ... (show-depth b) ...]
 [horizontal (l r) ... (show-depth l)
 ... (show-depth r) ...]))
```

(show-depth **Ok**) → **0 Ok**

# Show Depth

Template:

```
(define (show-depth g)
 (type-case GUI g
 [label (t) ...]
 [button (t e?) ...]
 [choice (i s) ...]
 [vertical (t b) ... (show-depth t)
 ... (show-depth b) ...]
 [horizontal (l r) ... (show-depth l)
 ... (show-depth r) ...]))
```

(show-depth  ) → ...  ...  ...

# Show Depth

Template:

```
(define (show-depth g)
 (type-case GUI g
 [label (t) ...]
 [button (t e?) ...]
 [choice (i s) ...]
 [vertical (t b) ... (show-depth t)
 ... (show-depth b) ...]
 [horizontal (l r) ... (show-depth l)
 ... (show-depth r) ...]))
```

recursion results don't have the right labels...

# Show Depth

The `n` argument is an *accumulator*:

```
; show-depth-at : GUI num -> GUI
(define (show-depth-at g n)
 (type-case GUI g
 [label (t) (label (prefix n t))]
 [button (t e?) (button (prefix n t) e?)]
 [choice (i s) g]
 [vertical (t b) (vertical (show-depth-at t (+ n 1))
 (show-depth-at b (+ n 1)))]
 [horizontal (l r) (horizontal (show-depth-at l (+ n 1))
 (show-depth-at r (+ n 1)))]))

; show-depth : GUI -> GUI
(define (show-depth g)
 (show-depth-at g 0))
```

# How to Design Programs

- Follow the design steps
- Use accumulators when necessary
- Reuse functions and/or “wish” for helpers